


*ZEDx one

Monocular Camera & SDK Overview

The ZED X One is the ideal choice for flexible integration and customization of stereo systems or for multiple-camera surround vision. It is especially well-adapted for large machines.

The ZED X One offers two sensor options: 2.3 MP Global Shutter and 4K Sony Starvis 2, making it ideal for robots deployed in low-light conditions in various sectors including agriculture, logistics or construction.

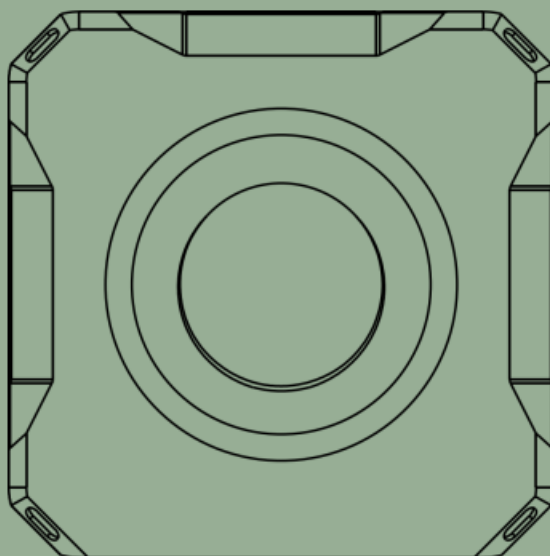

Rev1.2

*ZED X One General Specifications

Global or Rolling shutter

Choose the best sensor for your application. Capture distortion-free images of lightning-fast action with our global shutter sensor or benefit from ultra-high resolution even in low-light conditions with our rolling shutter sensor.

secure GM SL2 connection

GMSL2 connectivity is ideal for robotics. Transmit video without EMI and high data rate through a lockable interface to a Jetson Orin over a distance of up to 15M with low latency.

Multi-camera synchronization

Hardware synchronization for multiple connected cameras at frame-level within 15 microseconds. Capture RGB and depth images of the same scene with multiple cameras all triggered at the same time.

LOW-level camera control

Benefit from low-level control to finely tune image parameters and achieve unparalleled image quality and customization in camera firmware development.

High-performance IMU


The all-new IMU combines a 16-bit triaxial accelerometer and gyroscope with vibration resistance, ultra low noise and bias for exceptional motion tracking

Multiples-mount lens options

Benefit from multiple lens options to create the best camera system for your application.

*ZED X One Lens Options

Global shutter




wide

2.2mm fixed focal lens offers an exceptionally wide field of view while also providing optically corrected distortion for enhanced image quality.

Narrow

The 4mm focal length lens is perfect for an enhanced resolution and depth accuracy at longer ranges.

4k sony star vis2



wide

3.05mm fixed focal lens offers an exceptionally wide field of view while ensuring distortion correction and optimal light sensibility, resulting in superior image quality.

* ZED X One General Specifications

ZED X ONE

camera Model	ZEDX ONE GS			ZEDX ONE 4K	
sensor	on semi ARO234			sony IM X678	
size	1/2.6"			1/1.8"	
Resolution	1928 (H)X 1200(V)			3856(H)X2180 (V)	
pixel size	3um x3um			2um x 2um	
shutter sync	Global shutter			Rolling shutter	
Lens options Focal	None	wide	Narrow	None	wide
Length	-	2.2mm	4mm	-	3.1mm
FOV	-	120.8°(D) 110°(H) 79.6°(V)	91°(D) 80°(H) 52°(V)	-	118.8°(D) 109.9°(H) 71.8°(V)
Lens Mount	S-Mount				
Motion sensor	3-axis Accelerometer - ODR 200Hz - Res. 16 bit - Max 12g 3-axis Gyroscope - ODR 200Hz - Res. 16 bit - Max 1000 °/sec				
Connector	serial coax GM SL2 connector - FAKRAZ				
operating Temp	-20°C to +55°C (-4°F to 131°F)				
power	power via GM SL2(po c)				
consumption	Typically~0.73w				
Mounting option	4x M4 (bottom) + 1/4"-20UNC adapter plate				
Dimensions	31mm x 31mm x38.6mm	31mm x 31mm x52.7mm	31mm x 31mm x 52mm	31mm x 31mm x 38.6mm	31mm x 31mm x 58.1mm
weight	48g	55g	50g	48g	59g
part number	ZED-411010	ZED-412010	ZED-413010	ZED-421010	ZED-422010
warranty	2-year hardware warranty				


* ZED X One Sensor Stack Specifications

The IMX678 SONY Starvis 2 sensor offers excellent low-light performance and cutting edge HDR technology for unparalleled clarity and detail in high resolution video recording.

IM X678 SONY starvis 2 Technology

sensor Type	1/1.8" 8.4MP CMOS
Array size	3856 x2180 pixels
pixel size	2um x2um
shutter	Rolling shutter
output Resolution	3840x2160 @15ps 1920x1080 @60fps binning mode 1920x1200 @60fps cropping mode
output Format	RAW12(V4I2)/ NV21 (Argus)
Max s/N Ratio	>-40 dB
Dynamic Range	85dB
sen sivity	15886 Digit/I UX/ss

Exception al low-light capabilities and high sensitivity

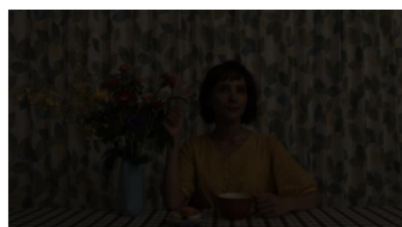

Conventional Front-illuminated image sensor



Sensor with STARVIS technology
Back illuminated image sensor

The AR0234 sensor delivers 2.3MP clarity and great low-light capabilities, ideal for capturing crisp and distortion free footage of fast moving objects in robotics applications.

ON SEMI AR0234

sensor Type	1/2.6" 2.3MPC MOS
Array size	1928x 1208 pixels
pixel size	3um x3um
shutter	Electronic al synchronized global shutter
output Resolution	1920x1200 @60fps 1920x1080 @60fps cropping mode 960x600 @120fps binning mode
output Format	RAW10(V4I2)/NV21 (Argus)
Max s/N Ratio	38dB
Dynamic Range	71.4dB
sen sivity	22.3ke/LUX*s

Distortion free images of fast moving objects



Rolling shutter




Global shutter

* ZED X One Accessories

FAKRAz cable

A wide range of camera cables are readily available, tailored to diverse requirements and applications, offered in varying lengths to suit both compact and expansive setups.

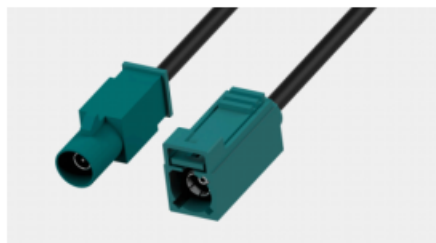


Male to Female

1.5m (4.93ft)	CBL-310100
5m (16.4ft)	CBL-310200
10m (32.8ft)	CBL-310300



Female to Female

0.3m (0.98ft)	CBL-320100
1.5m (4.93ft)	CBL-320200
5m (16.4ft)	CBL-320300
10m (32.8ft)	CBL-320400

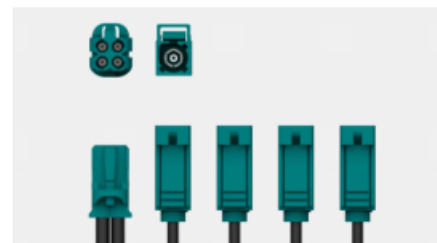

Female to Female-1-to-4

0.5m (1.64ft)	X
---------------	---

ZED Link Mono capture card

To capture the ZED X on the NVIDIA Jetson AGX platform, one solution is to utilize a GMSL2 capture card that directly connects to the Jetson's CSI port.



compatibility	NVIDIA Jetson Xavier/Orin platform
Max. number of cameras	1
Deserializer	MAX9296
Bandwidth	upto 6Gb/s total bandwidth
power	Requires external power (9v -19v)

ZED Box orin NX

The ZED Box, equipped with the latest NVIDIA Jetson Orin NX, serves as a robust AI gateway for autonomous robotics and advanced video analytics.




AI Performance	16GB - 100TOPS/ 8GB - 70 TOPS
compatible camera	ZED 2i stereo camera, ZEDx stereo camera
I/Os	3x USB 3.2 Gen2 (10 Gbps) 1x Micro USB OTG (Flash) 1x Gigabit Ethernet 1x HDMI, 4x Gigabit Multimedia Serial Links (GMSL2)** 1x WiFi 6 connectivity** 1x RTK GNSS GPS Ublox ZED F9P**

* ZED X One Accessories

ZED Link Dual capture card

To capture the ZED X on the NVIDIA Jetson AGX platform, one solution is to utilize a DUAL GMSL2 capture card that directly connects to the Jetson's CSI port.

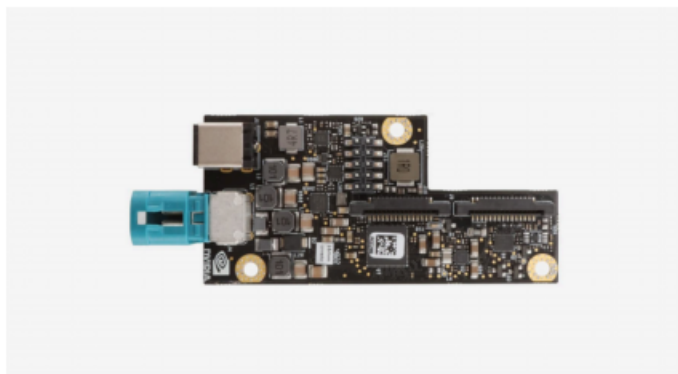

compatibility	NVIDIA Jet son xavier/orin platform
Max. number of cameras	2
De serialize r	MAX96712
Power	Via Samtec CSI port of the Jetson AGX External required when using MIPI ports

ZED Link Quad capture card

To capture the ZED X on the NVIDIA Jetson AGX platform, one solution is to utilize a QUAD GMSL2 capture card that directly connects to the Jetson's CSI port



compatibility	NVIDIA Jet son xavier/orin platform
Max. number of cameras	4
De serialize r	2 X MAX96712
Power	Requires external power(9v - 19v)

Dual camera Mount for ZED X One


This rigid aluminum mount allows you to mount two cameras on a tripod. Adjust the stereo baseline of your ZED X One and capture depth from 5cm to 100m.




Dimensions	310 x28x 6 mm (12.2x1.1 x 0.24 inch)
Mounting	Mount on any surface using M4 screws or on any tripod using 1/4" screws.
Cameras Separation Range	Minimum camera separation: 52mm. Maximum camera separation: 222mm.

* ZED X One Technical Drawings



ZED X one

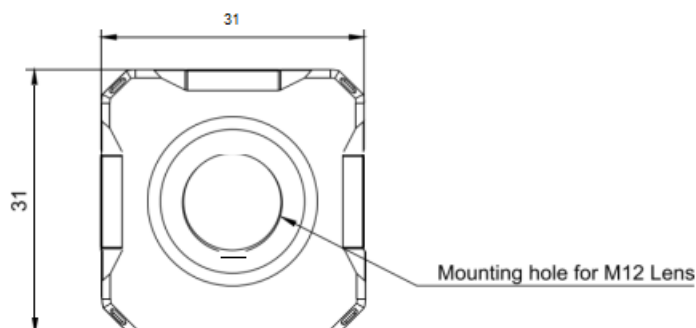

ZED xone GS WIDE

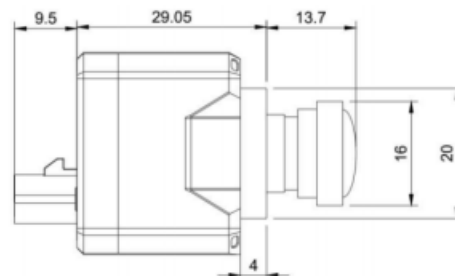

ZEDx one GS NARROW

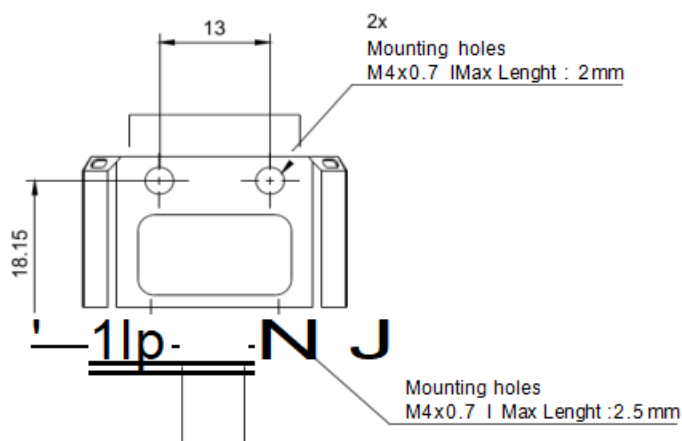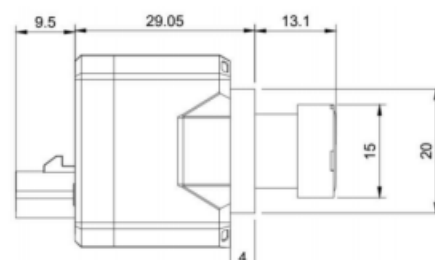

ZED xone 4K WIDE

